

Teledyne Isco Syringe Pumps

260D High Pressure Syringe Pump

7,500 PSI for High Pressure Applications

The 260D syringe pump provides precise, predictable flow and pressure control at flow rates from sub-microliter to 107 ml/min. Exceptional low-flow stability at up to 7,500 psi makes this the ideal pump for high pressure applications from deep well core analysis to multi-dimensional capillary LC using small-bore packed capillary columns.

The D-series controller has a keypad and LCD, as well as built-in and optional interfaces for computer control and other devices. Programming is easy and flexible, with instant access to menu screens even when the pump is running. This allows you to change operating parameters on the fly. An optional extension cable lets you locate the controller up to 50 feet from the pump.

The 260D pump module has a single-ratio drive train with auto-lubricating gears for long life and low maintenance. Special fittings are used to prevent leaks and ensure safety at maximum pressure.

Wetted materials are compatible with most aqueous and organic liquids, corrosive solutions, heated fluids, liquefied gases, viscous fluids, or slurries and pastes.

Applications

- Precision fluid addition in research and manufacturing processes
- Reactant feed in chemical process development, catalyst evaluation, plastic formulation
- Accurate metering of liquefied gases

Standard Controller Features

Operating Modes

- Constant flow or pressure with up to four pumps
- Gradient LC programming
- Flow or pressure programming with a single pump
- Continuous flow or pressure with dual pump

External Interface

- RS232/485 serial interface
- Analog voltage inputs
- Digital inputs and outputs




260D Specifications

Pump Module:	260D
Capacity:	266.05 mL
Flow Range (mL/min):	0.001 - 107 mL/min
Flow Accuracy:	± 0.5% of setpoint, (Maximum 0.50 µl/min seal leakage)
Displacement Resolution:	16.63 nl/step
Motor Stability:	± 0.001% per year
Pressure Range:	0.7 - 517.1 bar (10 - 7,500 psi)
Standard Pressure Accuracy:	0.5% FS
Optional Pressure Accuracy:	0.1% FS
Wetted Materials (Standard):	Nitronic 50, Graphite filled PTFE, TFE, Hastelloy C-276, inert polymers, gold, titanium
Plumbing Ports:	1/8" Valco
Operating Temperature:	5 - 40° C Ambient
Power Required:	100 VAC, 117 VAC, 234 VAC, 50/60 Hz (specify)
Dimensions (H x W x D)	103 x 27 x 47 cm (40.6" x 10.7" x 18.5")
Weight:	Pump unit - 32.8 kg, Controller - 2.96 kg
Standards Conformity:	EN1010-1, EN61326:1998, UL6101A-1, CSA1010 Compliant to the European Machinery Directive 2006/42/EC and the European Pressure Equipment Directive (PED) 2014/68/EU

260D Options & Accessories

- Hastelloy 276 cylinder for added corrosion resistance
- Temperature control jacket (i.e. cylinder cooling for filling with liquefied gas)
- High-precision pressure transducers (0.1% linear accuracy)
- Drivers for LabVIEW - National Instruments
- 4-20 mA input for flow rate and pressure control

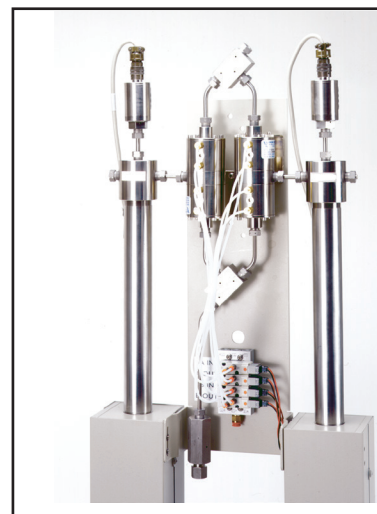

Continuous Flow Systems

260D Ordering Information

260D Pump Module (only)	68-1240-021
D Series Controller (only)	68-1240-026
260D Syringe Pump (includes controller)	67-1240-520
A260D Dual Pump Continuous Flow System with Air Valves	67-9000-062
E260D Dual Pump Continuous Flow System with Electrical Valves	67-9000-191



4700 Superior Street, Lincoln, NE 68504 USA • Phone: (800) 228-4373 / (402) 464-0231 • iscoinfo@teledyne.com / www.isco.com
Teledyne Isco is continually improving its products and reserves the right to change specifications without notice.